


SCG (THAILAND) CO.,LTD.



SPECIAL VALVE

SPECIAL VALVE

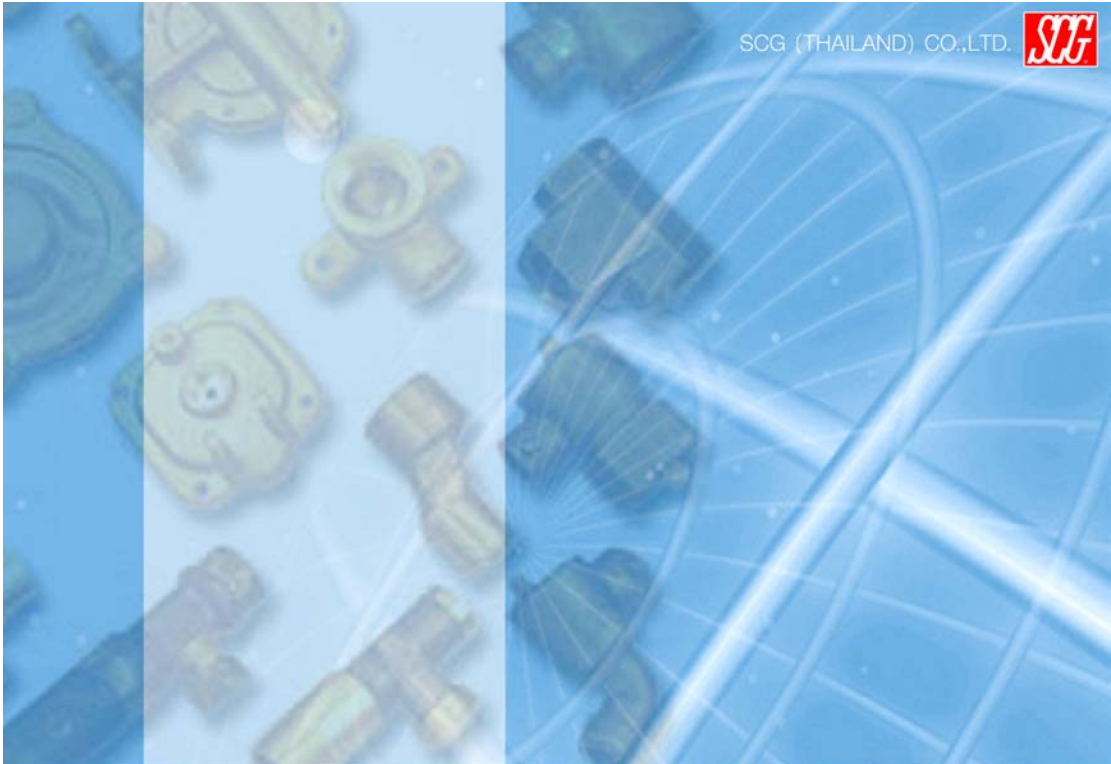

D-V89-A.4

Model No. D-V89-A.4 (Multi Valve)
 Safety Relief : With 375 – 480 PSI
 Bleeder Screw : With Inlet Thread : 3/4" – 14 NGT
 Outlet : 0.885" – 14 NGO – LH
 Excess Flow Device : With
 Ferrule : Without
 Dip Tube : With
 HandWheel : Aluminium
 Remark : for Vapour Withdrawal



D-CVD2-B.1

Model No. D-CVD2-B.1 (REFRIGERANT VALVE)
 Safety Relief : With FLOW 260 CFM (42 BAR) Bleeder Screw : Without
 Inlet Thread : 3/4" – 14 NGT
 Outlet Thread : 1.030" – 14 NGO-RH-EXT (CGA 660)
 Excess Flow Device : Without
 Ferrule : Without
 Dip Tube : With LIQUID OFFTAKE TUBE CUT AS REQUIRED
 HandWheel : PLASTIC UV RESISTANT



D-V8-E.1

Model No. D-V8-E.1 (DUAL PORT REFRIGERANT VALVE)
 Safety Relief : With 42 BAR Bleeder Screw : Without
 Inlet Thread : 3/4" – 14 NGT
 Outlet Thread : 1/4" SAE – FLARE CGA – 165
 Excess Flow Device : Without
 Ferrule : Without
 Dip Tube : Without
 HandWheel : UV Protection
 Remark : Dual port liquid & Vapour valve (Double O-Ring)



D-V50EX-L

Model No. D-V50EX-L (METHYL BROMIDE VALVE)
 Safety Relief : Without
 Bleeder Screw : Without
 Inlet Thread : 0.715 – 18T
 Outlet Thread : 1/4" – 19BSP – RH
 HandWheel : Aluminium Color Green DOUBLE ORINGS SYSTEM WITH HDPE TUBE

